

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

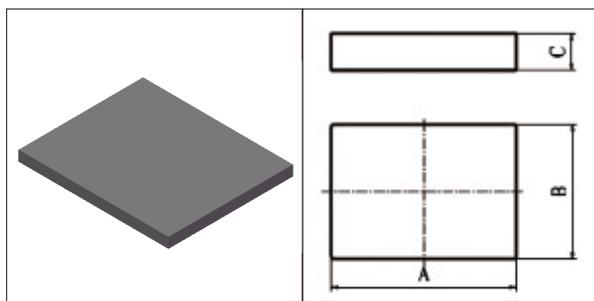


FIG.1

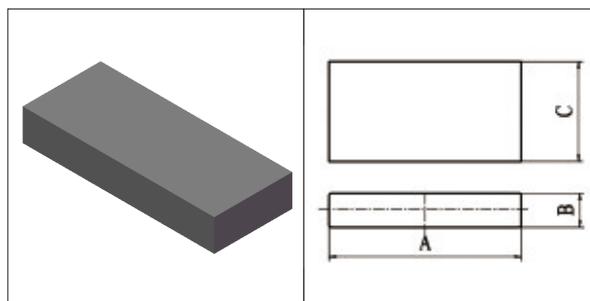


FIG.2

I 型 / I Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)			重量(Ref) g /PRS
		A	B	C	
I4.3/3.8/1	1	4.34+0.11/-0.12	3.77±0.09	1.01+0.08/-0.07	0.10
I10/4.8/2.5	2	10±0.2	4.75±0.15	2.45±0.15	0.56
I10.7/9.2/5.2A	1	10.65±0.35	9.2±0.3	5.21±0.05	2.45
I10/7/2.3	1	10±0.2	7±0.15	2.3±0.1	0.77
I110/6/5	1	110±1.5	5±0.2	6±0.3	15.84
I12/10.5/6	1	12±0.3	10.5±0.2	6±0.05	3.63
I12.8/8.4/6.3	2	13+0/-0.5	8.4±0.35	6.3±0.05	3.23
I12.8/8.7/1.1B	1	12.8+0.2/-0.3	8.7±0.25	1.1±0.1	0.59
I14.5/9.5/8.5B	1	14.5±0.3	9.5±0.2	8.5±0.1	5.62
I14.6/9.4/1.8	1	14.6±0.25	9.4+0/-0.3	1.8±0.1	1.17
I15/8/8A	1	15±0.3	8±0.2	8±0.1	4.61
I15.8/8.4/6.3	2	15.75±0.25	8.4±0.3	6.3±0.1	3.99
I16/13/8	1	16±0.3	13±0.2	8±0.05	7.99
I17/10/2	1	17±0.4	10±0.2	2±0.1	1.63
I17.8/2.5/1.5A	4	17.8+0.2/-0.5	2.5±0.25	1.4+0.3/-0.1	0.32
I18/10/2E	1	18±0.35	10.0±0.2	2±0.1	1.73
I18.2/13/1.6	1	18.2±0.3	13±0.2	1.6±0.1	1.82
I20/5/2.3A	1	20±0.3	5±0.2	2.3±0.15	1.10
I20.5/2.9/2	4	20.5±0.5	2.9±0.25	2±0.2	0.60
I21.8/10/2.2	1	21.8±0.3	10±0.15	2.2±0.1	2.30
I21.8/15.8/2.5D	1	21.8±0.4	15.8±0.3	2.5±0.15	4.13

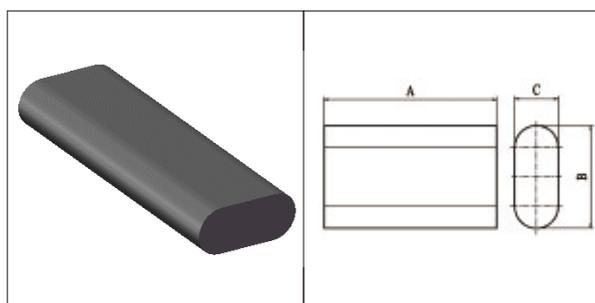


FIG.3

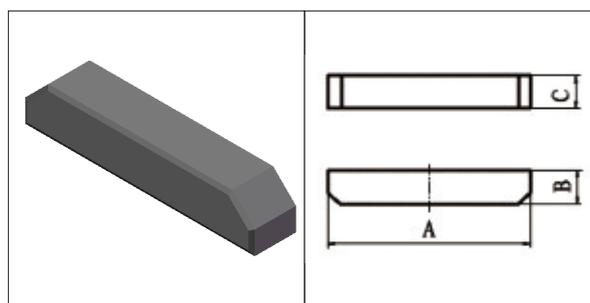


FIG.4

I 型 / I Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)			重量(Ref) g /PRS
		A	B	C	
I21.8/8/2.5	1	21.8±0.4	8±0.3	2.5±0.1	2.09
I21/12.8/1.9	1	21±0.3	12.8±0.2	1.9±0.1	2.45
I22/6/4B	1	22.0±0.6	6.0+0/-0.5	4.0±0.3	2.43
I25/8/3.5A	3	25±0.5	8±0.2	3.5±0.1	3.17
I25/25/2	1	25±0.4	25±0.4	2±0.1	6.00
I27.9/12.7/8.9	1	27.94±0.42	12.7±0.2	8.89±0.15	15.14
I28.6/15.5/5.5	1	28.6±0.5	15.5±0.25	5.5±0.1	11.70
I30/30/2	1	30±0.45	30±0.45	2±0.1	8.82
I30.5/10.7/4.5	1	30.5±0.6	10.7±0.3	4.5±0.2	7.05
I30.6/22.7/4.5	1	30.6±0.4	22.7±0.3	4.5±0.15	15.00
I31/22.5/10	1	30.5±0.5	22.6±0.5	10±0.4	33.09
I32/20/3	1	31.75±0.64	20.32±0.4	3.18±0.2	9.85
I32/21/2.4A	1	32±0.6	21±0.4	2.4±0.1	7.74
I35.5/35.5/5	1	35.5±0.7	35.5±0.7	5±0.15	30.25
I35/6/2.5	1	35±0.5	6±0.3	2.5±0.2	2.52
I37.1/37.1/5	1	37.1±0.7	37.1±0.7	5±0.15	33.03
I39.2/38.2/5	1	39.2±0.7	38.2±0.7	5±0.15	35.94
I40/10/5A	2	40±0.5	10±0.5	5±0.5	9.50
I40/11.7/7.5	1	40±0.8	12+0/-0.6	7.5±0.3	16.85
I40/12/2.5A	3	40±0.8	12±0.3	2.5±0.2	5.90
I41/6/2.5A	1	41±0.5	6±0.2	2.5±0.1	2.95

*-A为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

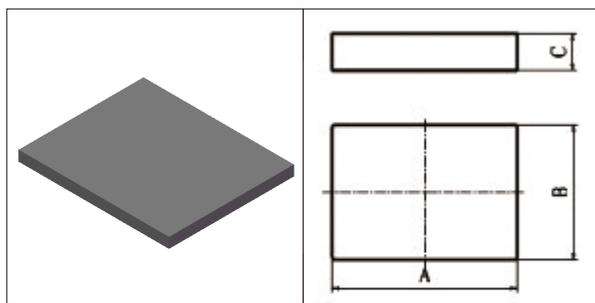


FIG.1

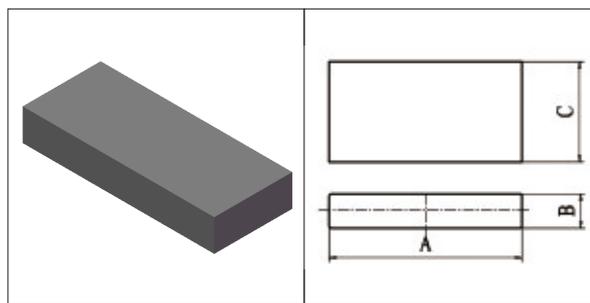


FIG.2

I 型 / I Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)			重量(Ref) g /PRS
		A	B	C	
I42.5/41.5/1.3	1	42.5±0.6	41.5±0.6	1.3±0.15	11.01
I44/11/10.4A	1	44±1.1	10.4±0.3	11±0.1	24.16
I44/29.8/10.4A	1	44±1.1	10.4±0.3	29.8±0.1	65.46
I45/40/12	1	45±0.5	40±0.5	12±0.3	103.68
I48/32/8	2	48±0.6	32±0.5	8±0.2	57.75
I49.5/15/3.5	2	49.5+0/-0.5	15+0/-0.4	3.5+0/-0.2	12.35
I50/10/3	2	50±1.5	10±0.2	3±0.4	6.97
I50/11/2.8	3	50+0.2/-0.8	11+0/-0.3	2.8+0.04/-0.15	6.85
I50/11/5	1	50+0.5/-0.3	11.4±0.1	5±0.2	13.71
I50/12/2.5	3	50±0.8	12±0.3	2.5±0.2	7.30
I50/12/2.8	3	50+0.2/-0.8	12+0/-0.3	2.8+0.04/-0.15	7.50
I50/12/3E	2	50±0.5	12±0.3	3±0.1	8.64
I50/33/3	2	50±0.7	33±0.5	3±0.2	23.50
I50/50/10	1	50±0.8	50±0.8	10±0.2	120.00
I52/37/3	1	52±0.7	37±0.55	3±0.15	27.71
I53/53/17.7	1	53±0.7	53±0.7	17.7±0.15	238.65
I56/22/3	2	56±0.5	22±0.5	3±0.15	17.70
I58.8/10/3B	1	58.8+0.3/-1.3	10+0.1/-0.3	3+0.1/-0.15	8.31
I59/9/4	2	59±0.5	9+0/-0.3	4±0.1	10.11
I60/12/2.5C	1	60±0.4	12±0.2	2.5±0.15	8.64
I60/12/2.5	3	60±0.8	12±0.3	2.5±0.2	8.80

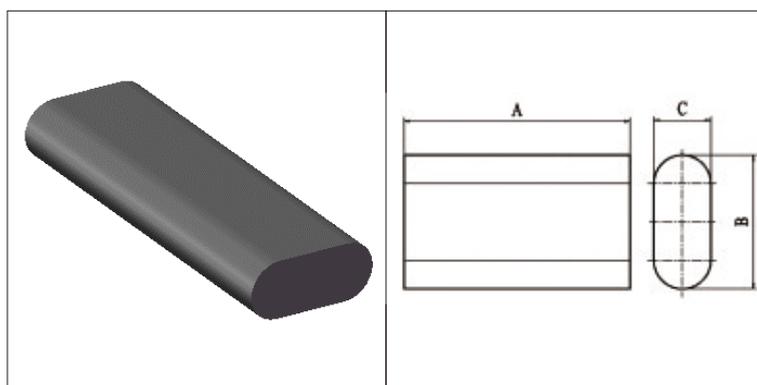


FIG.3

I 型 / I Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)			重量(Ref) g /PRS
		A	B	C	
I60/15.6/8.3	2	60.0±0.8	15.6±0.4	8.3±0.3	37.29
I60.8/6/6	2	60.8±0.9	6±0.1	6±0.1	10.10
I63/7/2	2	63±0.5	7±0.15	2±0.1	4.13
I64/13/5B	2	64.5+0.5/-1.5	13±0.3	5±0.2	20.00
I64.5/50.8/5.1	1	64±1.3	50.8±1	5.08±0.13	79.28
I66/10/3	2	66±1.5	10±0.4	3±0.2	9.33
I68/7/2.9B	1	68.05+0.6/-0.5	7±0.2	2.9±0.15	6.64
I70/13/4	2	69.7+0/-0.4	13+0/-0.4	4+0/-0.2	17.47
I70/70/17.5	1	70±2	70±2	17.5±0.5	411.60
I70/11/2.8	2	70+0.4/-1	11+0/-0.4	2.8+0.05/-0.25	9.50
I70/12/3D	2	70±0.6	12±0.3	3±0.1	12.09
I70/13/4A	2	70±1	13±0.3	4±0.15	17.47
I70/50/12	1	70±1.05	50±0.75	12±0.3	201.51
I72/64/12A	1	72±1.8	64±1.5	12±0.3	265.00
I75/14.7/4.9	1	75±1.1	14.9+0/-0.5	5+0/-0.3	25.58
I75.5/14.8/5.8	2	75.5±1.5	14.8±0.5	5.8±0.2	30.76
I75.5/14.8/5.8	1	75.5±1.5	14.8±0.5	5.8±0.2	31.11
I78/10/5	2	78±1.2	10±0.35	5±0.35	18.37
I79/24/4	2	79.15±0.85	23.5±0.5	4.0±0.2	35.71
I80/12/3D	2	80±0.8	12±0.3	3±0.1	13.82
I82/6.3/3	2	82±1.2	6.3±0.25	3±0.1	7.00

*-Al为磁心对应参考值,具体规格以双方签订承诺书为准; AL测试条件:1kHz 0.3V 10Ts; AL单位:nH/N2

*-图例仅展示产品形状,具体细节以实物或以双方签订承诺书为准。

锰锌氧铁材料规格尺寸 Specification and Dimensions of MnZn Ferrite Material

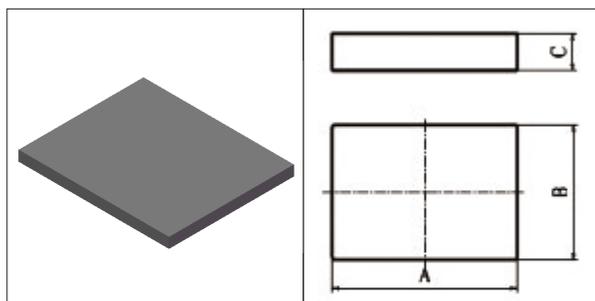


FIG.1

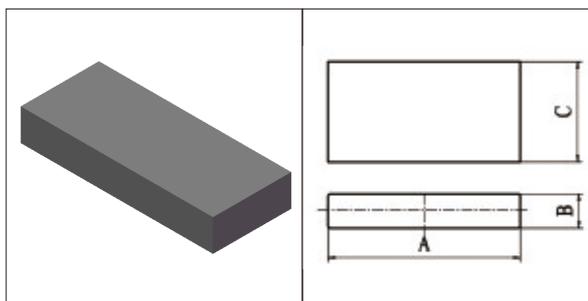


FIG.2

I 型 / I Core

型号 TYPE	图例 FIG.	尺寸 Dimensions (mm)			重量(Ref) g /PRS
		A	B	C	
I84.2/14.7/4.9	2	84.2±0.8	14.9+0/-0.5	5+0/-0.3	28.34
I84.2/14.7/4.9	1	84.2±0.8	14.9+0/-0.5	5+0/-0.3	28.72
I85/12.5/4A	1	85±0.8	12.5±0.2	4±0.15	20.40
I85.7/37.3/4.83	2	85.725±1.835	37.34±0.76	4.826±0.051	72.50
I86/14.7/4.9A	2	86±0.2	14.7±0.3	4.9±0.15	28.94
I86/14.7/4.9	2	86±0.85	14.9+0/-0.5	5+0/-0.3	28.94
I88/13/3	2	88±0.2	13±0.2	3±0.1	16.10
I90/8/3.9	2	90±1.2	8±0.3	3.85±0.2	13.60
I99.5/12/5	1	99.5±1.5	12±0.25	5+0/-0.4	27.51
I120/6/4	1	120±1.5	6±0.3	4+0.2/-0.1	14.34
I120/72/30	1	120±1.5	72±1	30±0.15	1244.16
I120/8/4B	1	120±1.2	8±0.25	4±0.15	18.43